


# PA400 APPLICATOR

## Tape Applicator System

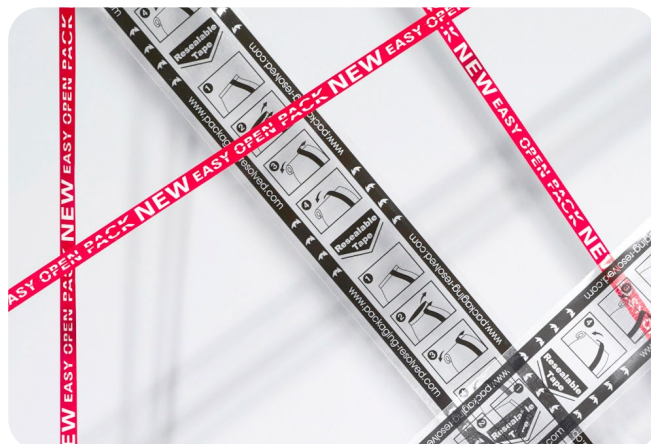

The **PA400** has been developed to dispense multiple tape solutions. Tape is applied at continuous high speed up to 400m/min and is ideally suited for high speed packaging lines. The PA400 is easily retrofitted onto most production machines. Guide rollers guide the tape to the location on the substrate.

### PRODUCT INFORMATION

#### VERSATILE

The PA400 works equally well with a number of tapes from the Filtrona Tapes range. The applicator can easily deploy tape with widths from 1.6mm to 30mm.

#### EXCELLENT CONTROL

The rotational speed is governed by demand from the packaging machine which is controlled by the tension arm and the diameter of the reel within parameters set on the control panel. The reel of tape is driven by a braked A.C. motor. Tape application mirrors line speeds of up to 400 m/min.


#### EASY TO USE

The PA400 has been designed to suit the latest high speed machinery. It can be configured for left or right hand applications with the final positioning roller being customisable to suit your process.

#### SIMPLE TO INSTALL

Custom made brackets are used to mount the PA400 in position. The final positioning roller can be mounted via a clamp to a scale shaft, which is calibrated to allow quick and easy repositioning.

### SPECIFICATIONS

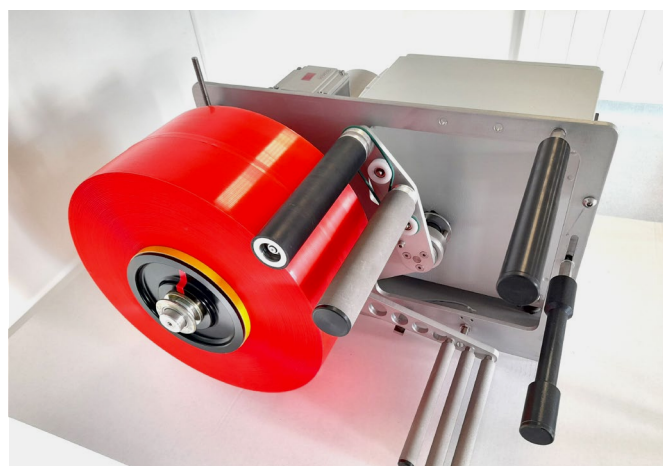

Model	PA400
Dimensions	390(L) x 590mm(H) x 615mm(D)
Voltage	230V 1p.h +N
Power	0.55 Kw
Diameter of Core	152mm max inner 400mm max outer
Maximum Speed	400m/min
Weight	Max 65Kg

Contact us for more information:

**T: +44 (0)115 975 9000**

**E: [tapesenquiry@filtrona.com](mailto:tapesenquiry@filtrona.com)**



[www.filtrona.com/tapes](http://www.filtrona.com/tapes)  Filtrona Tapes